



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 466 209 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **91115527.3**

(51) Int. Cl.⁵: **H03M 1/24**

(22) Date of filing: **10.03.88**

This application was filed on 13 - 09 - 1991 as a divisional application to the application mentioned under INID code 60.

(43) Date of publication of application:
15.01.92 Bulletin 92/03

(60) Publication number of the earlier application in accordance with Art.76 EPC: **0 331 828**

(84) Designated Contracting States:
CH DE FR GB IT LI SE

(71) Applicant: **KABUSHIKI KAISHA YASKAWA
DENKI SEISAKUSHO
2346, Ohaza-Fujita, Yahatanishi-Ku
Kitakyushu-Shi, Fukuoka 806(JP)**

(72) Inventor: **Nagase, Takashi
127-3 Hananoki
Iruma-shi, Saitama-ken(JP)**

(74) Representative: **Hughes, Brian Patrick et al
Graham Watt & Co. Riverhead
Sevenoaks, Kent TN13 2BN(GB)**

(54) **Absolute encoder of the multirotation type.**

(57) Each slit track of the disk of an optical type absolute encoder are divided into a group corresponding to an area to which a LED can emit light. A reference track of only a transparent portion is provided in this group. In the case of converting a detection signal into square waves, the detection signal is converted into a square wave output by using the output signal of the reference track as an index.

EP 0 466 209 A2

FIELD OF THE INVENTION

The present invention relates to an absolute encoder of the multirotation type in which a one-pulse encoder of the magnetic type for detecting the number of rotations and the rotating direction and an absolute encoder of the optical type for detecting the absolute angle within one rotation are combined on the same shaft, the absolute angle of the rotations of the shaft is detected on the basis of detection signals of the encoders, and when power sources which are supplied to the encoders are cut, a power source is supplied from an external auxiliary power source such as a battery power source or the like to the one-pulse encoder and to an electronic circuit to measure the detection amount of the one-pulse encoder.

DESCRIPTION OF THE PRIOR ART

Fig. 10 is a diagram showing a constitution of a conventional example of a kind of multirotation type absolute encoder.

An optical type absolute encoder to detect the absolute angle within one rotation comprises: a disk 2, attached to a shaft 1, for detecting the absolute angle within one rotation; a light emitting section LED 4₀ to project the light to the disk 2; a light projecting lens 3; a grating 5 and photo sensing devices 6₁ to 6₁₅ to detect photosignals; and waveform shaping circuits 7₁ to 7₁₅ to shape the waveforms of the detection signals into square waves. A magnetic type one-pulse encoder to detect multirotations comprises: a disk 8₁ which is attached to the shaft 1 and has a magnet 8₂ attached to its rotating section; a magnetoresistive element 9 to detect the number of rotations of the disk 8₁; a waveform shaping circuit 10; and a power switching circuit 11 for switching a power source to an external auxiliary power source such as a battery power source or the like when the supply of the power source is cut. To detect the rotating direction, the magnetic type one-pulse encoder to detect the multirotations outputs square wave signals M₁ and M₂ of two phases having a phase difference of 90°. The multirotations are detected by counting the signals M₁ and M₂ by counters (not shown) provided in an external controller. On the other hand, the optical type absolute encoder to detect the absolute angle within one rotation outputs signals G₁ to G₁₅ (15 bits in the case of detecting 32768 pulses) in accordance with the resolution and detects the absolute value from these signals.

The foregoing conventional multirotation type absolute encoder has the following problem if it is used as a detector to detect the position of a robot or similar equipment.

The following two kinds of methods can be used as a constituent of the light projecting section of an absolute encoder. In one method, the LED 4₀ and the collimator lens 3 to convert the light to the parallel light are used as shown in Fig. 10. In the other method, each pair of light emitting devices and photo sensing devices (4₁ and 6₁), (4₂ and 6₂), ..., (4₁₅ and 6₁₅) are used for one bit of the absolute encoder as shown in Fig. 11.

According to the former method, since the light is emitted from a single LED, a change in light quantity on the temperature of the LED exerts an influence on the photo sensing device. Therefore, if the change in light quantity to the temperature of the LED is detected and controlled, the influence of the temperature can be reduced. However, to cover all of the photo sensing devices, a lens of a large outer diameter is necessary. When using such a large lens, the focal distance of the lens is long, so that the length of the absolute encoder cannot be reduced.

According to the latter method, although the problem of length is eliminated, the temperature changes of each pair of light emitting device and photo sensing device cannot be made constant. The temperature changes of each of the detection signals are variable. It is very difficult to compensate for the temperature changes.

As shown in Fig. 10, in conventional absolute encoders, in the case of fifteen bits, a total of fifteen sets of photo sensing devices 6₁ to 6₁₅ and waveform shaping circuits 7₁ to 7₁₅ for each bit are necessary. However, since there are variations in light quantities and sensitivities of the photo sensing devices, the frequency characteristics of each of the detection signals do not coincide. When the shaft rotates at a high speed, the phase of the gray code is deviated or the detection signal is cut. To prevent this, the absolute encoder can be used only at a low rotational speed near the stop state. It is difficult to control the absolute encoder by the servo control loop.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an absolute encoder of the multirotation type in which the influence by the temperature fluctuation and the length of encoder can be reduced.

It is another object of the present invention to provide an absolute encoder of the multirotation type having a high reliability which is suitable for high speed rotation.

The multirotation type absolute encoder according to the present invention is characterized in that: each slit track of the disk of the optical type absolute encoder are divided into a group corresponding to an area to which a LED can emit

light; a reference track of only a transparent portion is provided in said group; and the detection signal is converted into the square wave output by use of an output signal of the reference track as an index.

The multirotation type absolute encoder of the present invention is still further characterized in that a circuit to detect signals from a track of the maximum resolution is constituted by a differential input type current-to-voltage converter.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a constitution of an embodiment of a multirotation type absolute encoder of the present invention;

Fig. 2 is a diagram showing signal formats of outputs of channels A and B in the embodiment of Fig. 1;

Fig. 3 is a circuit diagram of a waveform shaping circuit 10 of a magnetic encoder;

Fig. 4 is a waveform diagram of output pulses M_1 and M_2 of the waveform shaping circuit 10;

Fig. 5 is a diagram showing patterns of an absolute encoder;

Fig. 6 is an enlarged diagram of a portion of the absolute encoder of Fig. 1;

Fig. 7 is a diagram showing the circuit section in Fig. 6 corresponding to only one slit;

Fig. 8 is a circuit diagram to output 15 bits, i.e., 32768 pulses;

Figs. 9A - 9K are diagrams showing the phase relation of square wave output signals;

Fig. 10 is a diagram showing a constitution of a conventional multirotation type absolute encoder;

Fig. 11 is a diagram showing the main section of another conventional multirotation type absolute encoder; and

Fig. 12 is a diagram showing a constitution of a conventional multirotation type absolute encoder using balanced line driver.

DESCRIPTION OF THE PREFERRED EMBODIMENT

An embodiment of the present invention will be described in detail hereinbelow with reference to the drawings.

Fig. 1 is a diagram showing a constitution of an embodiment of a multirotation type absolute encoder of the invention. Fig. 2 is a diagram showing signal formats of outputs of channels A and B in the embodiment of Fig. 1. An optical type absolute encoder to detect the absolute angle within one rotation comprises: a disk 2, attached to a shaft 1, for detecting the absolute angle within one rotation; a LED 4 to emit light to the disk 2; a grating 5; a photodiode array 6 consisting of photo sensing

devices; and waveform shaping circuits 7₁ to 7₁₅ to shape the waveforms of detection signals of those photo sensing devices into square waves. A magnetic encoder to detect the multirotations comprises: a disk 8₁ having a magnet 8₂ attached to the rotating section; a magnetoresistive element 9 to detect the number of rotations; a waveform shaping circuit 10; a power switching circuit 14 for switching the power source to an external battery power source when the supply of the power source is cut; a high volumed capacitor 15 to drive the circuit by the accumulated voltage if the battery power source is cut; a voltage detecting circuit 13 to detect the power source voltage; a control circuit 12 having therein a micro-computer to count detection signals of multirotations and to keep the count value; a control circuit 17 including a gate array for serially transmitting the detection signals of multirotations and the absolute value signal within one rotation as signals of channels A, B, and Z, respectively, after the power source is turned on; and a balanced line driver 16 to send those signals to an external controller.

The operation of the embodiment will now be described.

First, a voltage is supplied from the battery power source to the multirotation type magnetic encoder. This voltage passes through a diode D_1 and is supplied as the power source voltage to the magnetic encoder to detect the multirotations, the control circuit 12 having therein a microcomputer for counting a number of multirotation signals and holding them. Even when no power source is supplied (e.g., also including during a power failure), the number of rotations of the shaft 1 is detected.

Next, when the power source voltage is supplied, it is supplied as the power source voltage to each circuit of, for example, an absolute encoder and, at the same time, it is charged into the capacitor 15 by a diode D_2 . The power source is also supplied to each circuit such as a magnetic encoder through a diode D_3 . Assuming that the power source voltage is 5V, the battery power source voltage is 3V, and the forward voltage drop of each of the diodes D_1 to D_3 is 0.7 V, the power source voltage V_1 which is applied to the magnetic encoder becomes 3.6 V ($= 5 - 0.7 \times 2$) and is larger than the battery voltage of 3 V. Thus, the diode D_1 is set into the reverse bias state. While the power source is being applied, there is no need to supply a current from the battery power source. Thus, the life of the battery is lengthened.

Each section will now be described in detail.

(Signal transmission)

When the power source voltage is supplied, the voltage detecting circuit 13 operates and sends

signals to the control circuits 17 and 12. The control circuit 17 then operates and first transmits the multirotation detection signal of the shaft 1 as a start-stop system signal to the channel A signal and as serial data to the external controller. In this embodiment, this signal is transmitted by the ASCII code (9600 bauds) of eight characters. The absolute value signal which is detected the second time by the absolute encoder is transmitted as incremental pulses of channels A and B to the external controller (Fig. 2). In the external controller, the absolute position of the multirotations can be detected from those two signals. After the transmission, by transmitting the pulses of two phases of channels A and B in a manner similar to the conventional method, the positioning can be performed by an incremental encoder.

(Detecting section of the magnetic encoder and the high volumed capacitor 15)

Fig. 3 is a circuit diagram of a waveform shaping circuit of the magnetic encoder. Fig. 4 is a waveform diagram of output pulses M_1 and M_2 of this circuit. As will be understood from the diagrams, the pulse M_1 (M_2) is obtained by detecting the differential output of magnetoresistive element 2MR and 4MR (1MR and 3MR). The waveforms are shaped by programmable operational amplifiers 1IC and 2IC whose electric power consumption is very small. To reduce the electric power consumption, magnetoresistive element 1MR to 4MR having high resistances of hundreds of kilohms are used. Further, resistors R_1 and R_2 of high resistances are serially connected. In this way, the electric power consumption of the whole circuit is reduced, thereby prolonging the life of the battery. In the control circuit 12 as well, not only a CMOS type microcomputer but also CMOS type control devices are used to minimize the current consumed. Thus, low current consumption is realized and, when the circuit is in the inoperative mode, current consumption is about 10 μ A. In addition, since the high volumed capacitor 15 is used, if the high volumed capacitor of 2 (F) is used as the capacitor 15, the circuit can operate for 100 hours or longer even if the power source or battery power source is cut. Therefore, even if the robot is moved for four days or more due to a production line change in a factory, the absolute value is held, so that the robot can be immediately restarted.

(Light emitting device section of the absolute encoder)

LED are used as the light emitting device. However, the conventional methods described in Figs. 10 and 11 have problems. Therefore, in the

case of 15 bits as shown in Fig. 1, three LEDs 4 are used, the light emitting positions are grouped and the grouped LEDs emit light. On the other hand, in the case of grouping, if the light emitted from the central and peripheral light emitting positions are not parallel, an accurate detection signal cannot be obtained. Therefore, an aspheric lens is used in the lens section to thereby obtain parallel light. Since it is sufficient to use parallel light and to emit light from each group, a small lens can be used in the LED. Thus, since the light emitting source has a short focal distance, the encoder is shortened.

(Pattern constitution of the absolute encoder)

Fig. 5 is a diagram showing a pattern of the absolute encoder. Fig. 6 is a circuit diagram of a portion of the absolute encoder in Fig. 1. To eliminate the drawback due to variations in light emitting devices and photo sensing devices shown in Figs. 11 and 12, the pattern of the absolute encoder is divided into three groups as described above. In the groups, transparent reference tracks D_1 , D_2 , and D_3 are provided as shown in Fig. 5. A one-chip silicon photodiode array is used as a photo sensing devices 6. In Fig. 5, circles S_A , S_B , and S_C indicated by broken lines show areas where light emitting diodes LED₁, LED₂, and LED₃ - (corresponding to three LEDs 4 each having an aspheric lens in Fig. 1) emit light. With this constitution, since the photo sensing devices are formed on the same silicon wafer, the temperature characteristics of the photodiodes are fairly 0 uniform. Therefore, by comparing the detection signal V_{S1} of a slit S_1 with a index signal V_{D1} derived from the reference track and by shaping the waveforms of these signals as shown in Fig. 6, the temperatures of the LEDs and photodiodes simultaneously change and the waveforms are shaped at this differential voltage, so that an output waveform which is extremely stable to the temperature can be obtained. By using one slit of the magnetic encoder as the minimum slit (MSB) of the absolute encoder, there is no need to form a slit in the absolute encoder section. Therefore, the number of tracks in the absolute encoder section decreases and the encoder can be miniaturized radically.

(Waveform shaping circuit section of the absolute encoder)

Two kinds of constitutions are used for the waveform shaping circuits 7₁ to 7₁₅ of the absolute encoder in accordance with the number of bits of the gray code. There is the problem that the conventional absolute encoder cannot be used at a high rotational speed because the frequency char-

acteristics of the respective bits differ. However, according to these constitutions, the absolute value signals are serially transmitted when the rotation is stopped and thereafter, the signals are sent by incremental signals in a manner similar to the conventional method. Therefore, no problem is caused even if the shaft is rotated at a high speed.

Fig. 7 shows a circuit in the circuit section in Fig. 6 corresponding to only one slit. This circuit is used in the waveform shaping circuit of two or more slits excluding the maximum slit of a high resolution. The magnitude of signal level of each slit is adjusted by a variable resistor VR. Since the frequency characteristics of the photodiode deteriorate as the load resistance increases, the characteristics of the slit in which the signal output is small and the variable resistor VR is largely adjusted deteriorate. However, since the absolute value is detected when the rotation is stopped, as described above, the characteristics of the encoder are not influenced by variations in signal level.

Fig. 8 is a circuit diagram to output 32768 pulses of 15 bits. In this embodiment, in order to reduce the number of tracks of the disk 2 to detect the absolute value, 4096 slits are used as the slit of the highest resolution (in general, 8192 slits are used). The signals detected by these slits are input to a differential input type current-to-voltage converter 20 to thereby obtain quasi-sinusoidal signals of 4096 slits. From these signals, quasi-sinusoidal signals whose phases are different by 45° at a time are obtained through a resistance divider 30. The waveforms of these signals are shaped by a waveform shaping circuit 40, thereby obtaining square wave signals.

Fig. 9 is a diagram showing the phase relations among square wave outputs GR₁, GR₀₀, GR₂, and GR₀₁ in Fig. 8.

The outputs GR₁, GR₀₀, GR₂, and GR₀₁ (each consisting of 4096 pulses) are shown in Fig. 9B, 9D, 9C, and 9E, respectively. The outputs GR₁, and GR₂ and the outputs GR₀₀ and GR₀₁ are input to exclusive OR circuits (not shown) in the control circuit 17, so that square wave output signals of two phases (of channels A and B) of 8192 pulses shown in Fig. 9H and in Fig. 9I are obtained. Figs. 9J and 9K show signals of channels Z and \bar{Z} , respectively. It is known that the frequency characteristic of a diode varies with the value of its load resistance, and is optimal when the value is zero, i.e., when the diode is short. Therefore, it is possible in principle to make the value zero by using a current-to-voltage converter. Further, it is possible to cancel common mode noise. For these reasons, a differential input type current-to-voltage converter 20 is used, whereby the frequency characteristics are also improved. Even if the shaft is rotated at a high speed, the characteristics can be sufficiently

satisfied.

The embodiment of Fig. 1 relates to the example in which one index pulse (channels Z and \bar{Z}) per rotation is added. Since the absolute value can be inherently detected, the index pulse which is used in the conventional incremental encoder is unnecessary. In this embodiment, index pulses are synthesized by the control circuit 17 and sent to the external controller. By always checking the number of pulses, a malfunction can be detected by the noise appearing during transmission. The reliability can be improved as follows. Since only one pulse of channel Z is output per rotation as compared with channels A and B, the probability that the noise is mixed with the pulse of channel Z is small, so that when the pulses of channels A and B are counted, if the encoder is operated while always checking the number of pulses of channel Z, the pulses can be transmitted with improved high reliability.

Claims

1. A multirotation type absolute encoder in which a magnetic type one-pulse encoder for detecting the number of rotations and its rotating direction and an optical type absolute encoder for detecting an absolute angle within one rotation are combined on the same shaft, the absolute angle of rotations of the shaft is detected on the basis of detection signals of said encoders, and when a power source which is supplied to said encoders is cut, a power source is supplied from an external auxiliary power source such as a battery power source to said one-pulse encoder and to an electronic circuit to measure a detection amount of the one-pulse encoder, characterized in that each slit track of the disk of said optical type absolute encoder is divided into a group corresponding to an area to which a LED can emit light, a reference track of only a transparent portion is provided in said group, and a detection signal is converted into a square wave output by using the output signal of said index track as an index.
2. A multirotation type absolute value encoder according to claim 1, wherein an LED is used as a light source of said optical type absolute encoder, and an aspheric lens is used as a condenser lens.
3. A multirotation type absolute encoder in which a magnetic type one-pulse encoder for detecting the number of rotations and its rotating direction and an optical type absolute encoder for detecting an absolute angle within one rota-

tion are combined on the same shaft, the absolute angle of rotations of the shaft is detected on the basis of detection signals of said encoders, and when a power source which is supplied to said encoders is cut, a power source is supplied from an external auxiliary power source such as a battery power source or the like to said one-pulse encoder and to an electronic circuit to measure a detection amount of the one-pulse encoder, characterized in that a circuit to detect signals from a track of the maximum resolution is constituted by a differential input type current-to-voltage converter.

5

10

15

20

25

30

35

40

45

50

55

6

FIG. 1

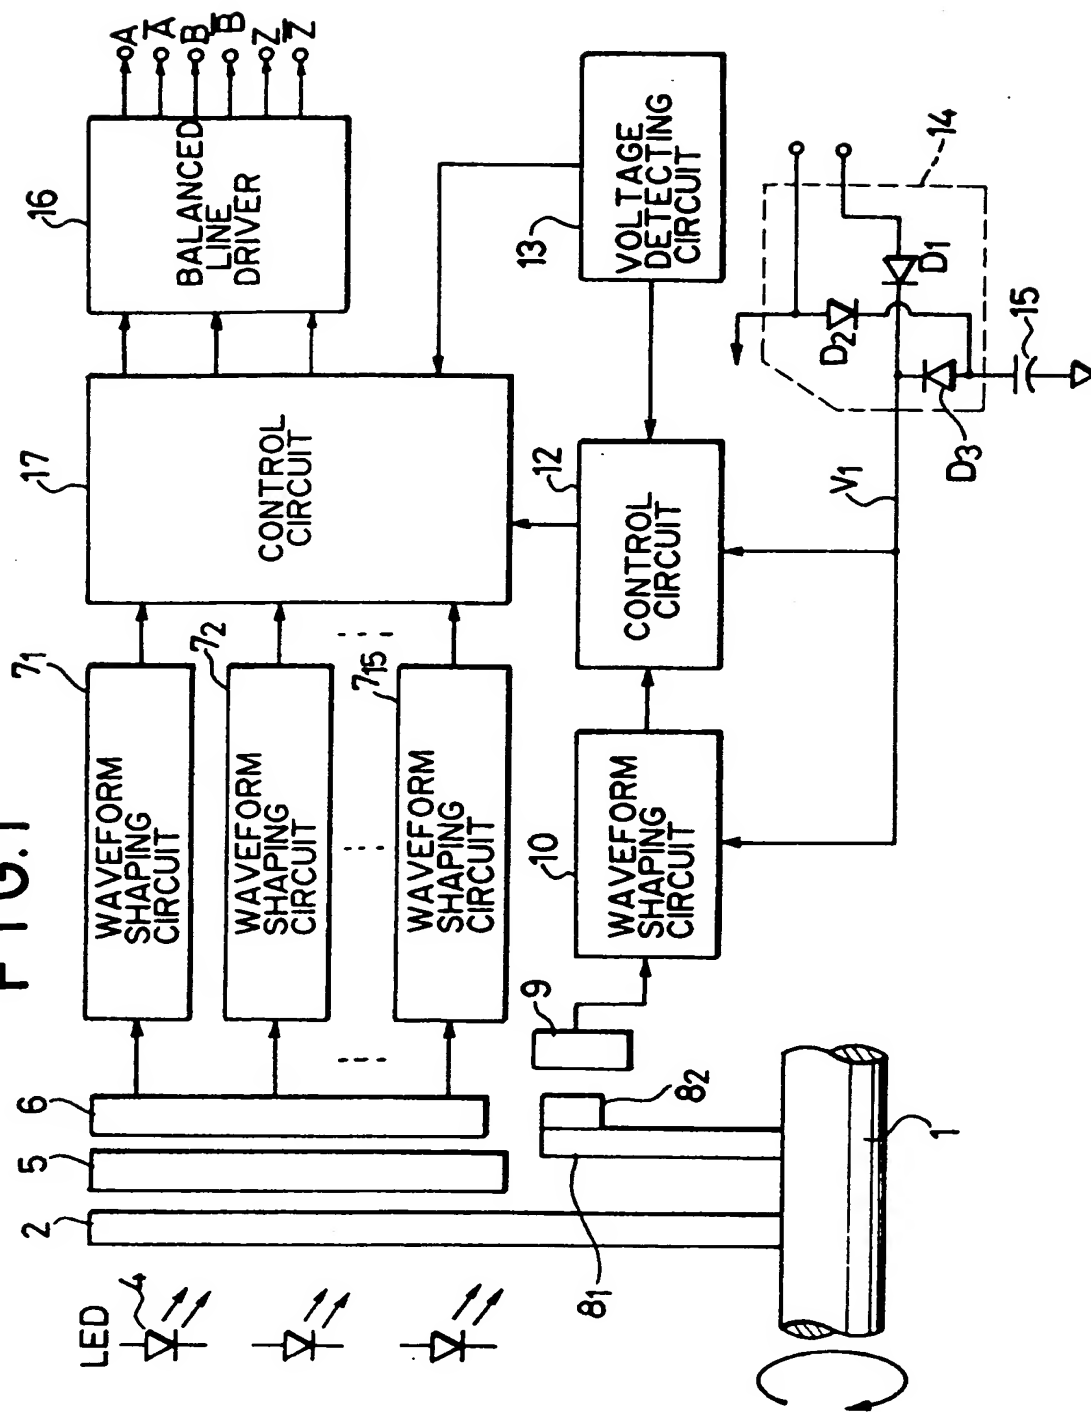


FIG.2

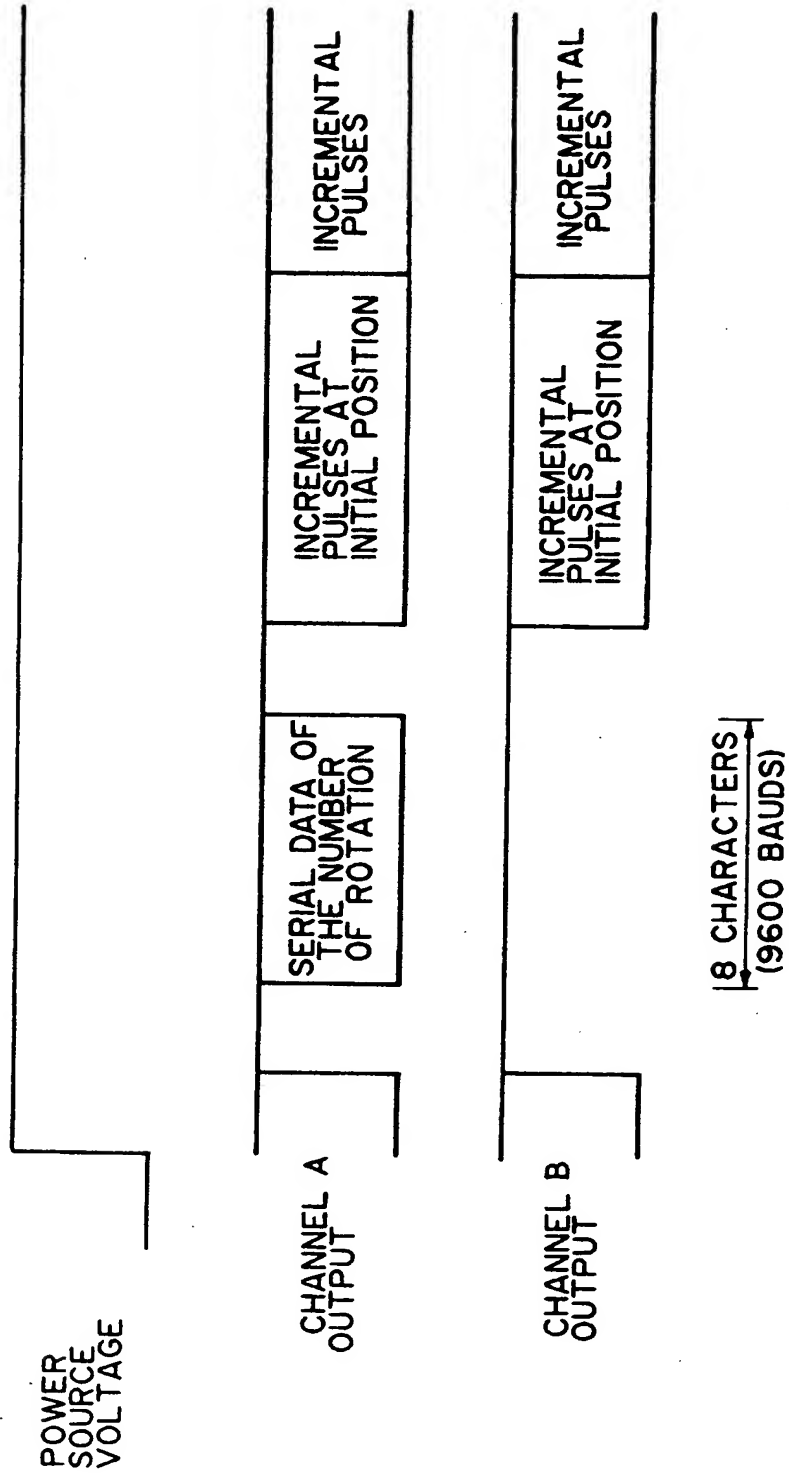


FIG.3

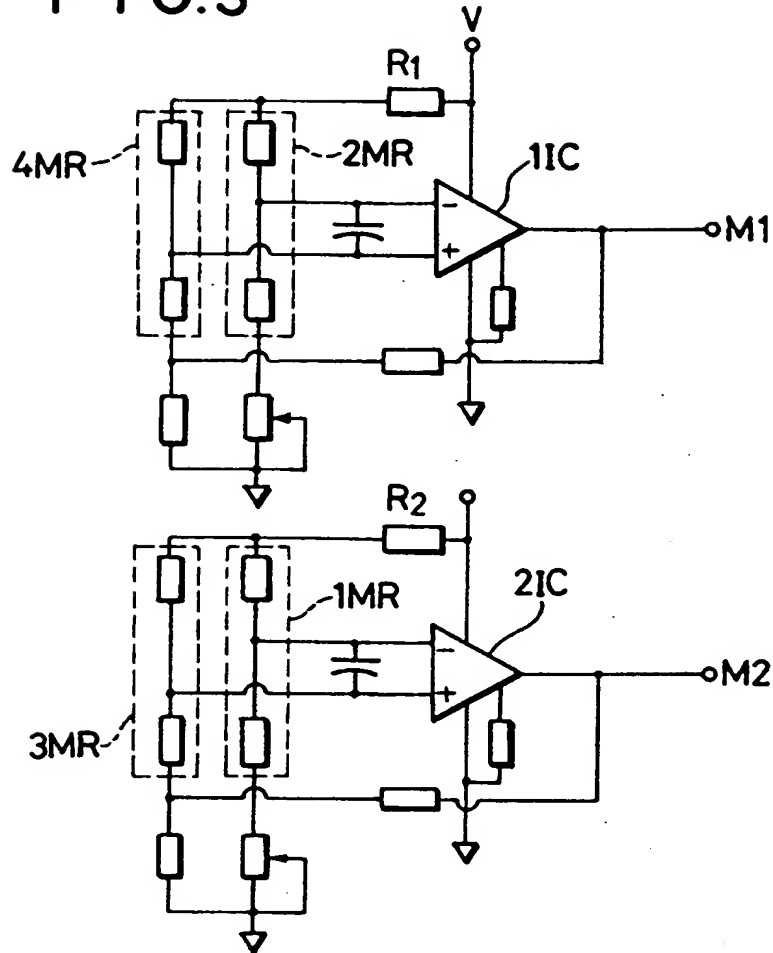


FIG.4

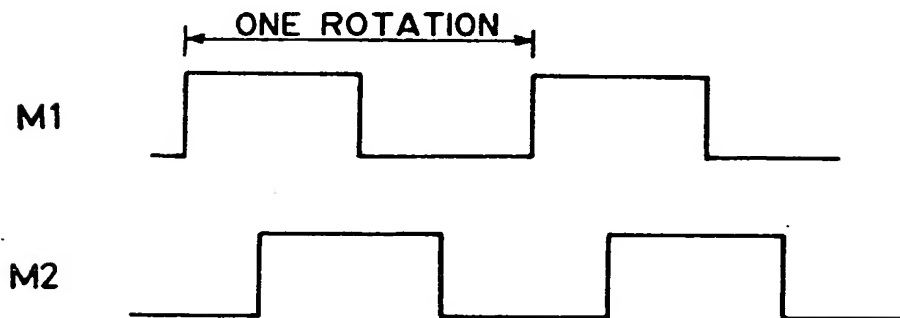


FIG.5

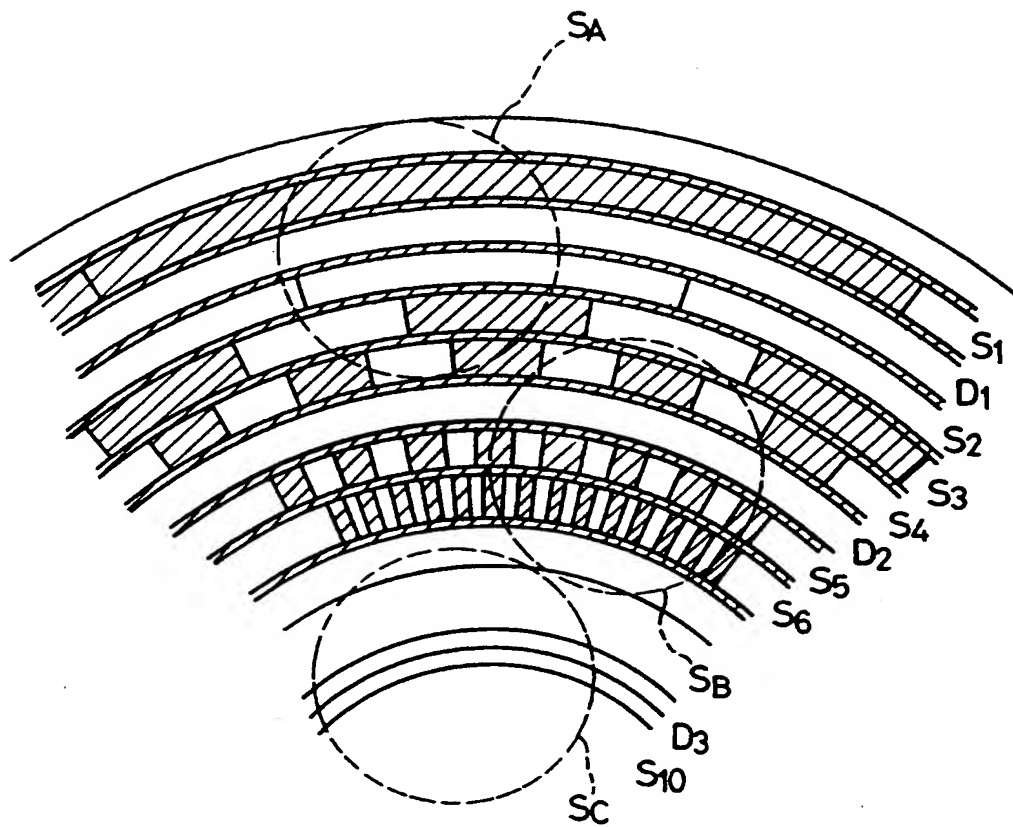


FIG. 6

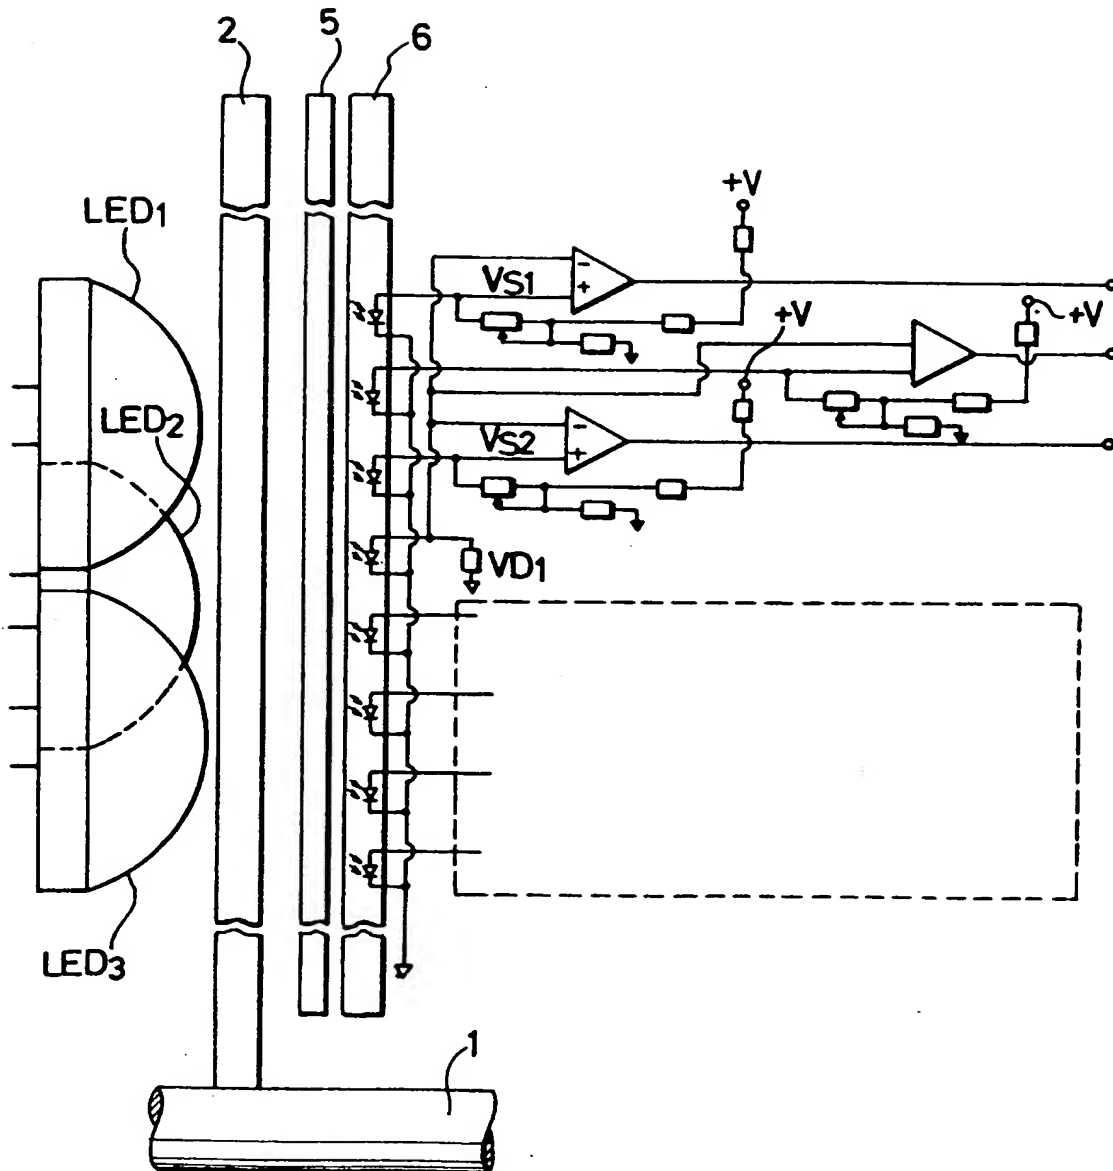


FIG. 7

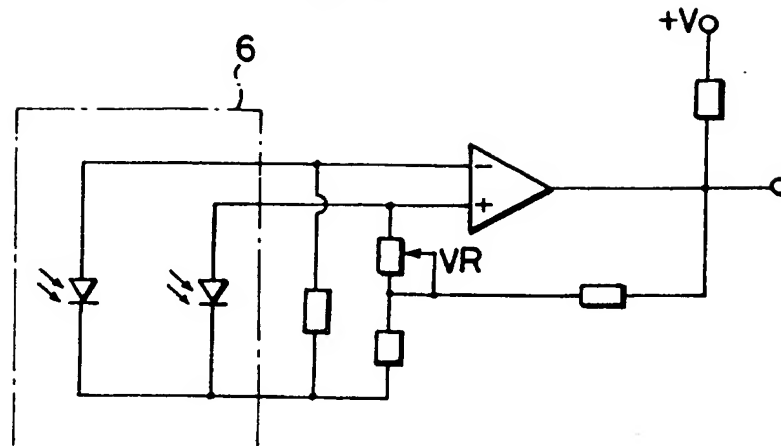


FIG. 9A

FIG. 9B

FIG. 9C

FIG. 9D

FIG. 9E

FIG. 9F

FIG. 9G

FIG. 9H

FIG. 9I

FIG. 9J

FIG. 9K

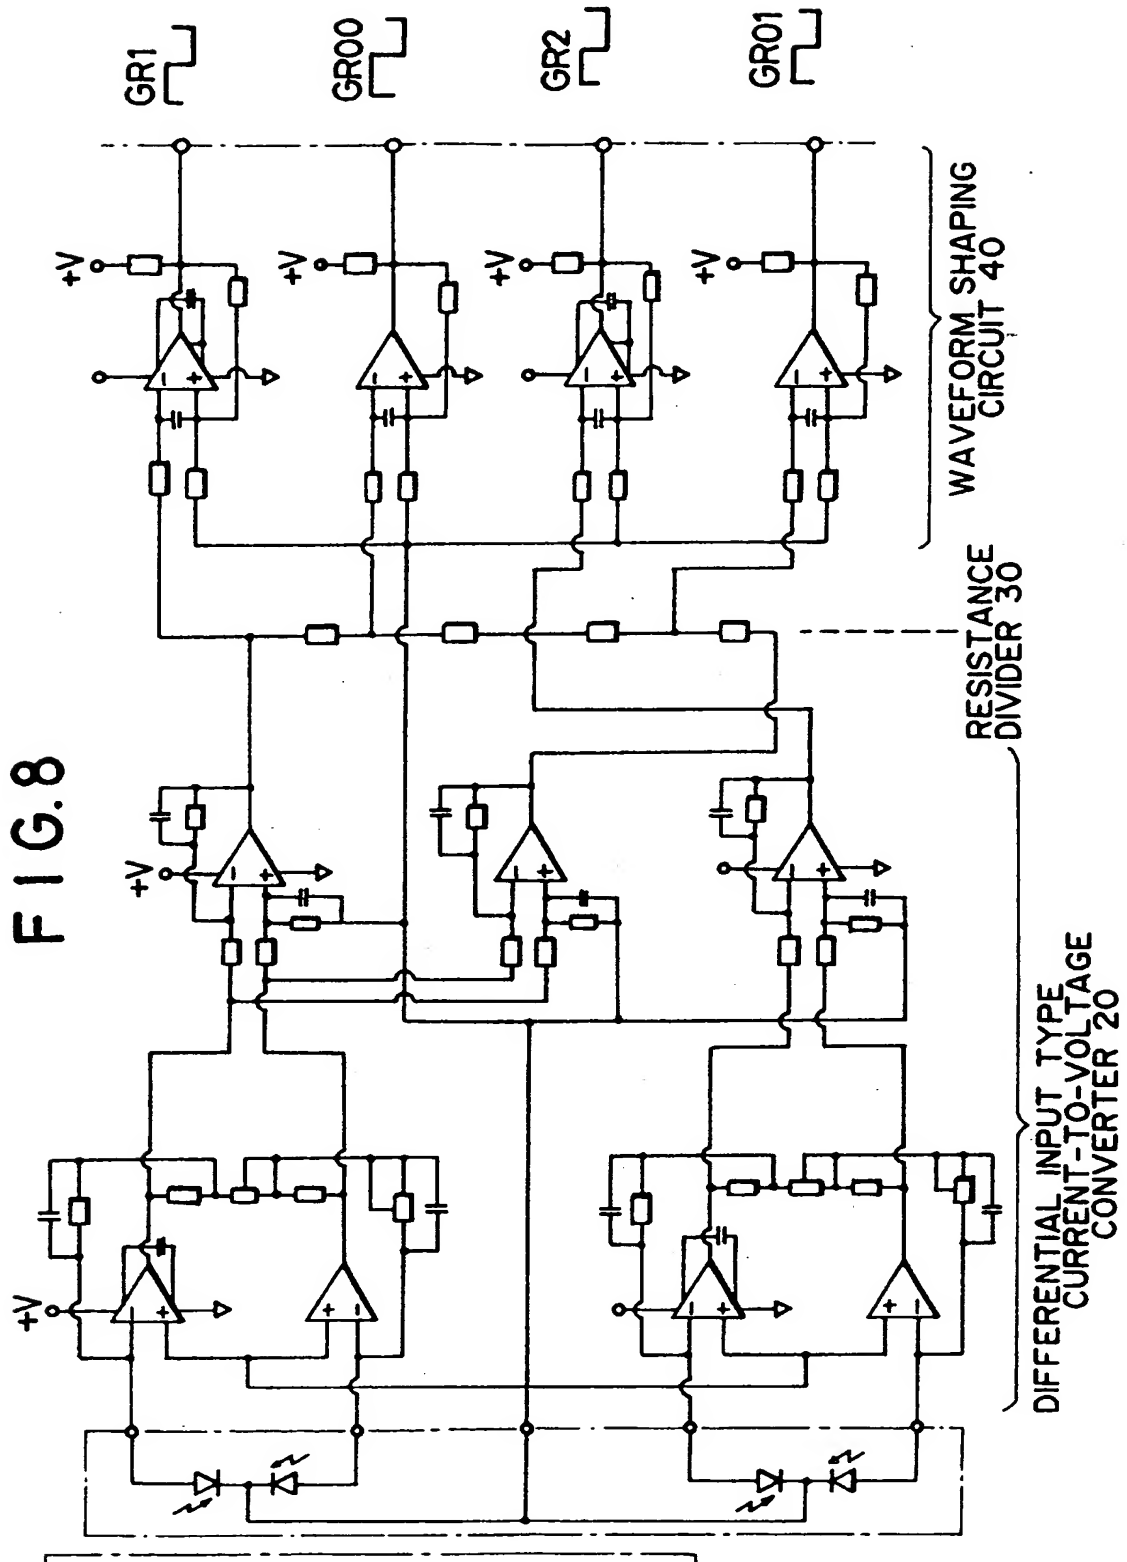


FIG.10

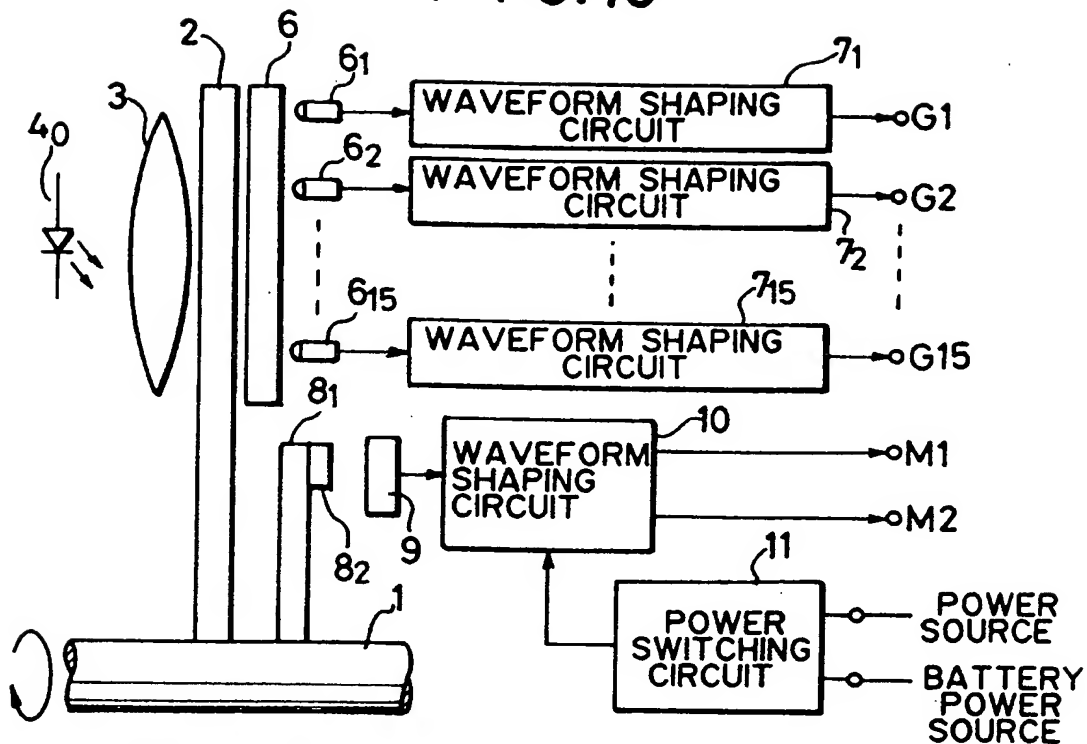


FIG.11


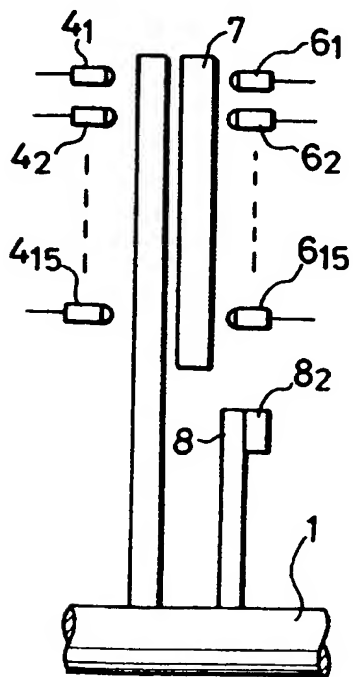


FIG. 12

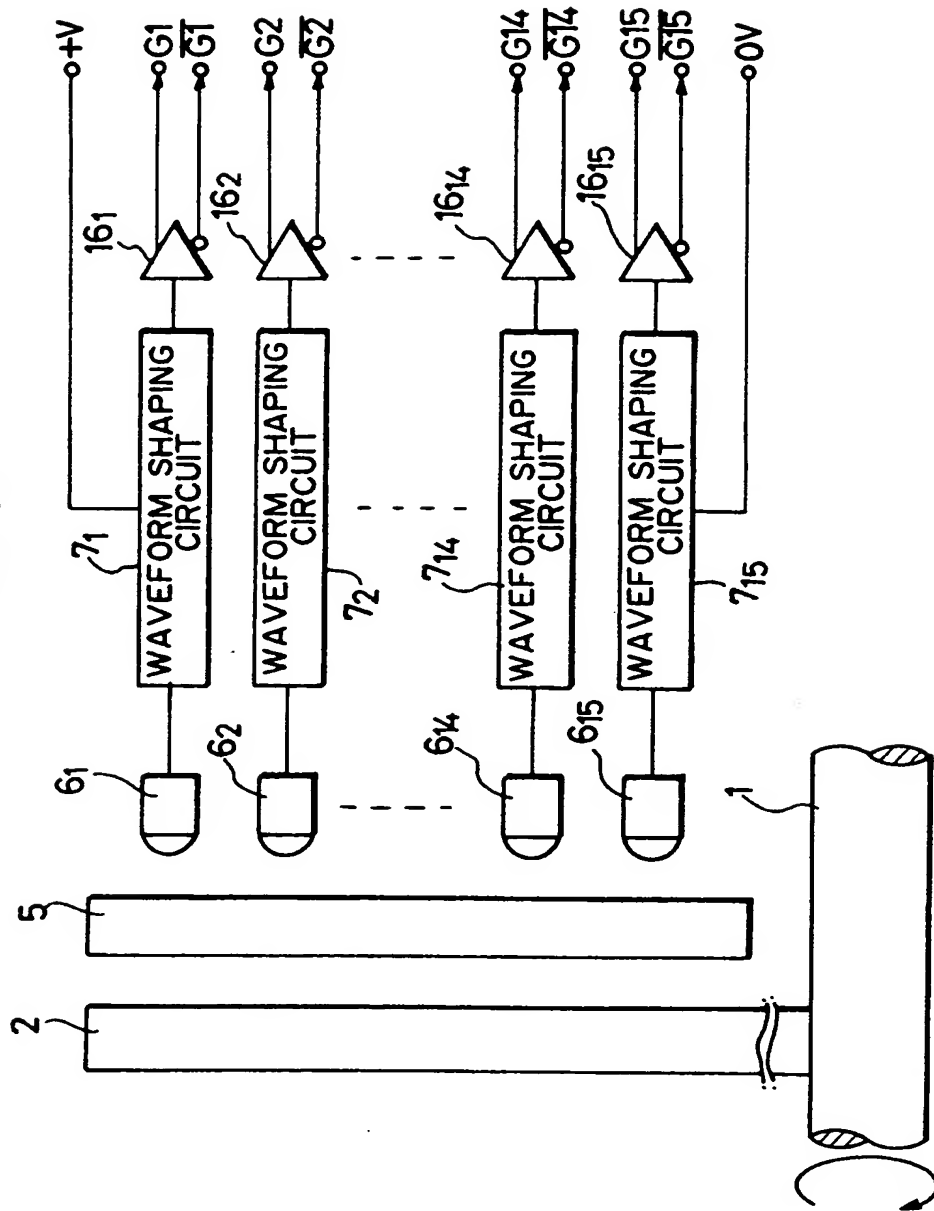

Absolute encoder of the multirotation type.

Patent Number: EP0466209
Publication date: 1992-01-15
Inventor(s): NAGASE TAKASHI (JP)
Applicant(s): YASKAWA DENKI SEISAKUSHO KK (JP)
Requested Patent: EP0466209, A3, B1
Application Number: EP19910115527 19880310
Priority Number (s): EP19880302064 19880310; JP19860230253 19860929
IPC Classification: H03M1/24
EC Classification: G01D5/16B1, G01D5/245C1, G01D5/249C, G05B19/39, G06F1/30, H03M1/06P, H03M1/10T1, H03M1/14P, H03M1/24
Equivalents: EP0463643, A3, B1, EP0464870, A3, B1
Cited patent(s): GB2118739; EP0201106; US3549897

Abstract

Each slit track of the disk of an optical type absolute encoder are divided into a group corresponding to an area to which a LED can emit light. A reference track of only a transparent portion is provided in this group. In the case of converting a detection signal into square waves, the detection signal is converted into a square wave output by using the output signal of the reference track as an index.

Data supplied from the esp@cenet database - I2

Docket # AR-R17

Applic. # _____

Applicant: ANTON RODI

Lerner and Greenberg, P.A.

Post Office Box 2480

Hollywood, FL 33022-2480

Tel: (954) 925-1100 Fax: (954) 925-1101

Deutsches Patent- und Markenamt

Deutsches Patent- und Markenamt · 80297 München

Herrn
Anton Rodi
Paul-Ehrlich-Str. 1
69181 Leimen

erk. 15.01.04
München, den 12.01.2004
Telefon: (0 89) 2195 3206
Anmelder/Inhaber: Rodi

Ihr Zeichen: *R-17 DE*

Ihr Antrag vom: 22.10.2003
auf Recherche gemäß §43 Patentgesetz

Bitte Aktenzeichen und Anmelder/Inhaber bei
allen Eingaben und Zahlungen angeben

Aktenzeichen: 103 12 045.9

Recherchebericht

A. Klassifizierung des Anmeldungsgegenstandes nach der Internationalen Patentklassifikation (IPC)

IPC 07
G 01 B 21/02
G 01 B 21/22

B. Recherchierte Gebiete

Klasse/Gruppe	Prüfer	Patentabteilung
G 01 B 21/02	DR. WOLFGANG HAMMER	52

Die Recherche im Deutschen Patent- und Markenamt stützt sich auf die Patentliteratur folgender Länder und Organisationen:

Deutschland (DE,DD), Österreich, Schweiz, Frankreich, Großbritannien, USA, Japan (Abstracts), vormalige UdSSR (Abstracts), Europäisches Patentamt, WIPO.

Recherchiert wurde in folgenden Datenbanken:

Name der Datenbank und des Hosts

DOKIDX

Klassen/Gruppen, die in Abschnitt A aufgeführt sind, jedoch in Abschnitt B nicht ausdrücklich erwähnt werden, wurden entweder durch eine IPC-übergreifende Datenbankrecherche erfasst oder dienen lediglich der Dokumentation und Information. In Klassen/Gruppen, die in Abschnitt B aufgeführt sind, jedoch nicht in Abschnitt A genannt sind, wurde mit dem im Abschnitt C angegebenen Ergebnis recherchiert.

C. Ergebnis der Druckschriftenermittlung

Kat.	Ermittelte Druckschriften	Erläuterungen	Betr. Ansprüche	IPC / Fundstellen
Y	DE 101 11 399 C1	(0026), (0029)	1	
A	DE 34 29 648 C2	Sp. 3, Z. 62 ff.		
D, Y	DE 101 17 193 A1	Fig. 1, 2	1, 3, 4	
Y	DE 101 09 185 A1	(0021), Fig. 3	1	
Y	DE 101 09 184 A1	(0022), Fig. 3	1	
Y	DE 42 29 610 A1	Sp. 2, Z. 19 ff.	1	
Y	EP 04 66 209 B1	Sp. 4, Z. 14 ff.	1	

Annahmestelle und
Nachbriefkasten
nur
Zweibrückenstraße 12

Hauptgebäude:
Zweibrückenstraße 12
Zweibrückenstraße 5-7 (Breiterhof)
Markenabteilungen:
Cincinnati-Str. 64
80331 München

Hausadresse (für Fracht):
Deutsches Patent- und Markenamt
Zweibrückenstraße 12
80331 München

Telefon: (089) 2195-0
Telefax: (089) 2195-2221
Internet: <http://www.dpma.de>

Bankverbindung:
Konto der Bundeskasse Weiden
BBK München
Kto.Nr.: 700 010 54
BLZ 700 000 00

- 2 -

Aktenzeichen: 103 12 045.9

4 Folgende Literatur und Zitate liegen dem Deutschen Patent- und Markenamt nicht vor:

Die Recherche kann sich auf den vom Anmelder/von der Anmelderin selbstgenannten Stand der Technik nicht erstrecken, der dem Deutschen Patent- und Markenamt nicht vorliegt. Wenn beabsichtigt ist, einen Prüfungsantrag nach § 44 PatG zu stellen, wird der Anmelder/die Anmelderin aufgefordert, diese Literatur in Kopie zur Prüfungsakte zu reichen.

E. Datum des Abschlusses der Recherche

05.01.2004

Vollständigkeit der Ermittlung:

Eine Gewähr für die Vollständigkeit der Ermittlung der einschlägigen Druckschriften und für die Richtigkeit der angegebenen Kategorien wird nicht geleistet (§43 Abs. 7 Satz 1 Patentgesetz bzw. §7 Abs. 2 Gebrauchsmustergesetz i.V.m. §43 Abs. 7 Satz 1 Patentgesetz).

Absendedatum des Rechercheberichtes**Anlagen: 7****Patentabteilung 1.11
Rechercheleitstelle**Docket # AR-R17

Applic. # _____

Applicant: ANTON RODI

Lerner and Greenberg, P.A.

Post Office Box 2480

Hollywood, FL 33022-2480

Tel: (954) 925-1100 Fax: (954) 925-1101